

EU38 SERIES

Low-Profile Marker Lamps



| Part# | Description | EAN Code |
|----------|---|---------------|
| EU38AM | Side Marker / Reflector, Amber Housing, Blister Pack | 9335962014200 |
| EU38AMB | Side Marker / Reflector, Amber Housing, Bulk Pack | 9335962015375 |
| EU38RM | Rear Marker / Reflector, Red Housing, Blister Pack | 9335962014217 |
| EU38RMB | Rear Marker / Reflector, Red Housing, Bulk Pack | 9335962015382 |
| EU38WM | Front Marker / Reflector, White Housing, Blister Pack | 9335962014224 |
| EU38WMB | Front Marker / Reflector, White Housing, Bulk Pack | 9335962015399 |
| EU38BAM | Side Marker / Reflector, Black Housing, Blister Pack | 9335962034536 |
| EU38BRM | Rear Marker / Reflector, Black Housing, Blister Pack | 9335962034543 |
| EU38BWM | Front Marker / Reflector, Black Housing, Blister Pack | 9335962034550 |
| EU38BKT | Horizontal Pendant Mounting Bracket, Bulk Pack | 9335962030620 |
| EU38BKTV | Vertical Pendant Mounting Bracket, Bulk Pack | 9335962030675 |

| | |
|-----------------------------------|----------------------|
| Voltage | 9-32V |
| Dimensions | 100 x 38 x 13mm |
| IP rating | IP67 |
| Warranty | 5 Years |
| Cable | 350mm (stripped-end) |
| Operating temperature | -30°C to +50°C |
| Current draw (13.8V / 28V) | 0.01A / 0.01A |

| ECE approval | Function | Approval# |
|--------------|----------------------|----------------|
| | Side Marker (R91) | SM1-E9-00.1304 |
| | Side Reflector (R3) | IA-E9-02.1304 |
| | Rear Marker (R7) | R1-E9-02.11294 |
| | Rear Reflector (R3) | IA-E9-02.11294 |
| | Front Marker (R7) | A-E9-02.11340 |
| | Front Reflector (R3) | IA-E9-02.11340 |

| | |
|----------------------------|--------------------------------------|
| Wiring colour codes | BROWN: Power [+] WHITE: Earth [-] |
|----------------------------|--------------------------------------|

Mounting instructions


⚠ Installation to be undertaken by a competent professional

CLICK & STICK EASY MOUNTING SYSTEM

Ensure mounting surface is flat, clean and dry prior to installation.


1. Drill 2 x 6mm holes for the two plugs
2. Drill a minimum 8mm hole for the wire
3. Peel off the paper protector for the 3M™ tape
4. Push lamp firmly into holes
5. The lamp is held in place by the plug serrations and the 3M™ tape

EU38BAM

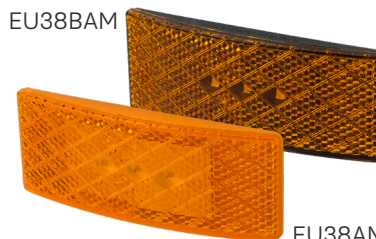

EU38AM

EU38BRM

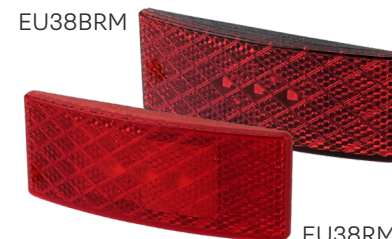

EU38RM

EU38BWM



EU38WM

